

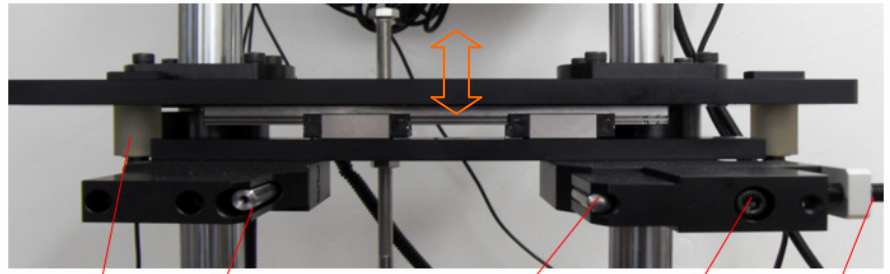


◆ 주요 사양

- 직경 50~150mm 가변조정형
- 측정위치 50~400mm 가변조정형
- 측정분해능 0.001mm, 반복정밀도 0.002mm
- 외경측정모듈 최대 8개 적용 가능(기구적 제한 있음)
- SPC Data 저장, 통계관리, 합부판정(부저/알람)
- 원터치 자동측정(별도버튼없음), 회전식 진원도 관리
- 기종관리(최대 20개), Excel 관리Data, 기종변경시간 2분
- 전방밀착후 자동 측정 완료

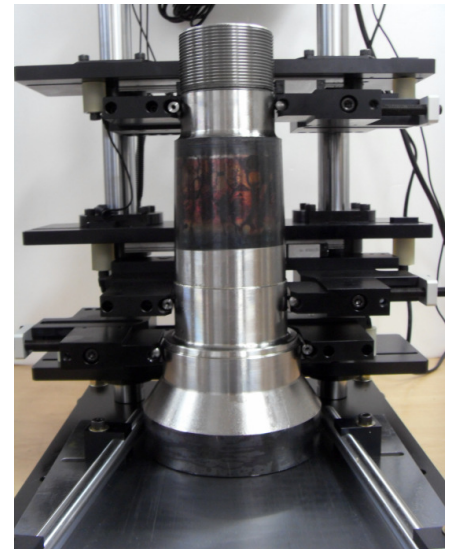

스토퍼 직경측정Tip 기준핀 가이드고정나사 직경조정나사

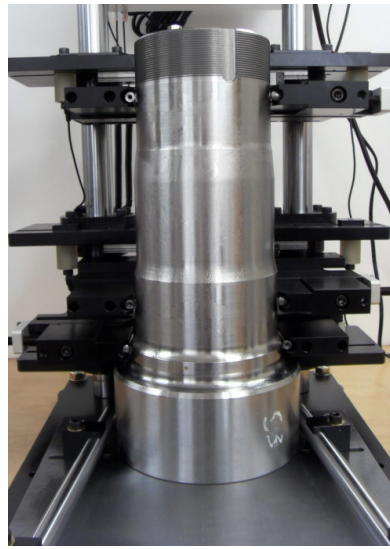

	A	B	C	D	E	F	G	H	I	J	K
	Name	BaseDia	MasterOD1	MasterOD2	MasterOD3	LowOD1	LowOD2	LowOD3	HighOD1	HighOD2	HighOD3
1	1062114	146.753	119.091	109.953	99.953	119.079	109.942	99.942	119.101	109.96	99.96
2	1062649	146.75	119.09	109.953	99.953	119.08	109.943	99.943	119.1	109.963	99.963
3	1066091	133	102.42	82.521	66.649	102.41	82.511	66.639	102.43	82.531	66.659
4	1066345	133	121.07	95.23	82.524	121.06	95.22	82.514	121.08	95.24	82.534
5	1066726	139	106.006	99.977	79.979	105.996	99.967	79.969	106.016	99.987	79.989
6	1066727	139	121.55	95.221	82.524	121.54	95.211	82.514	121.56	95.231	82.534
7	1066948	135	132.975	104.96	104.96	132.965	104.95	104.95	132.985	104.97	104.97
8	1068195	146.75	119.09	109.953	99.953	119.08	109.943	99.943	119.1	109.963	99.963
9	1068366	147	106.09	99.977	79.979	106.08	99.967	79.969	106.1	99.987	79.989
10	1068367	147	106.09	99.977	79.979	106.08	99.967	79.969	106.1	99.987	79.989
11											
12											
13											
14											
15											

